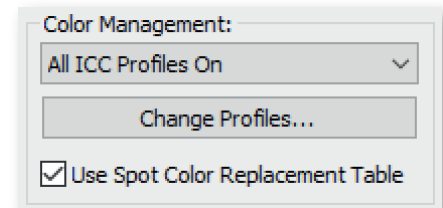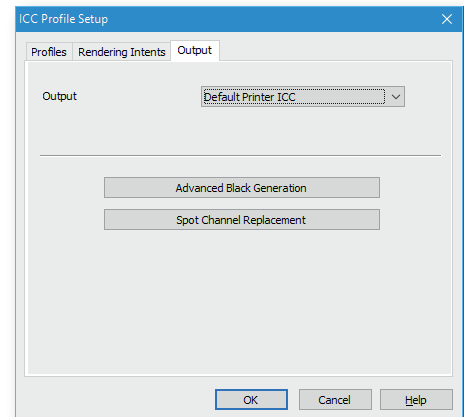**How to map the Color-Logic spot separation (CL 4713 SILVER) to a spot ink channel in ONYX Thrive and ONYX RIP Software.**
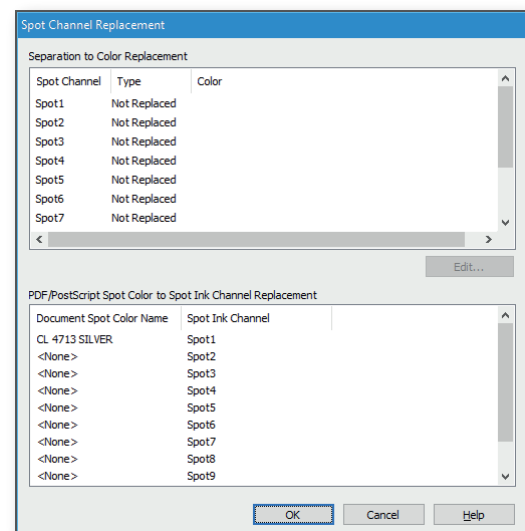
1.  In Job Editor, select the **Printer and Media Tab**, and click "**Change Profiles…**" button in the Color Management section.

2.  In the "**ICC Profile Setup**" window, click on the **Output** tab, and then the **Spot Channel Replacement** button.

3.  In the "**PDF/PostScript Spot Color to Spot Ink Channel Replacement**" section, click in the left column, and enter the spot separation name from your file that you want to map (CL 4713 SILVER) to a spot channel on the printer.
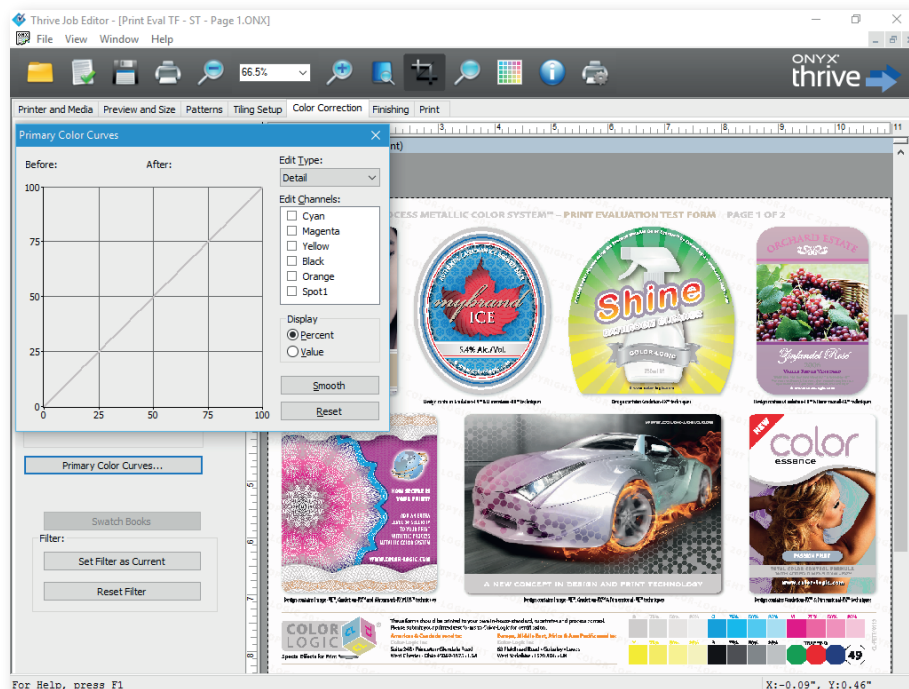
4.  Close out of all dialogs and click the **Apply** button on the Printer and Media tab to refresh the preview.

    **TIP:** This setting can be automated by setting up the spot separation mapping in a Quick Set.
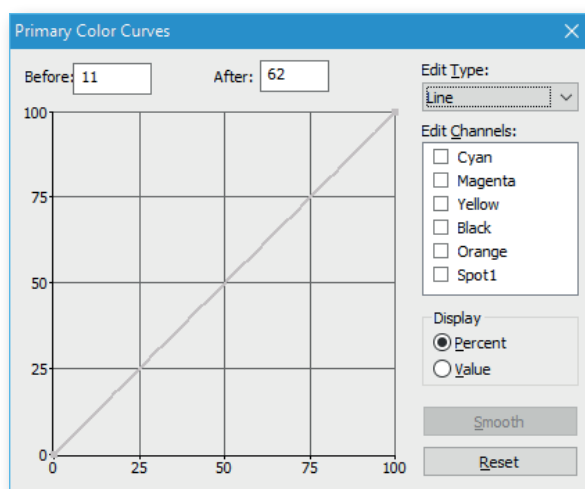
**How to invert the Color-Logic spot separation (CL 4713 SILVER) to print with white ink.**

Note: This working procedure requires editing the **Primary Color Curves** in **Job Editor**.
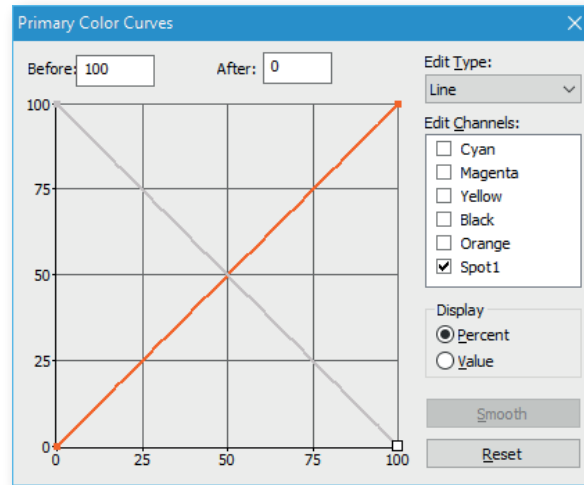
1. In **Job Editor**, go to the **Color Correction tab**, and click on the **Primary Color Curves** button.
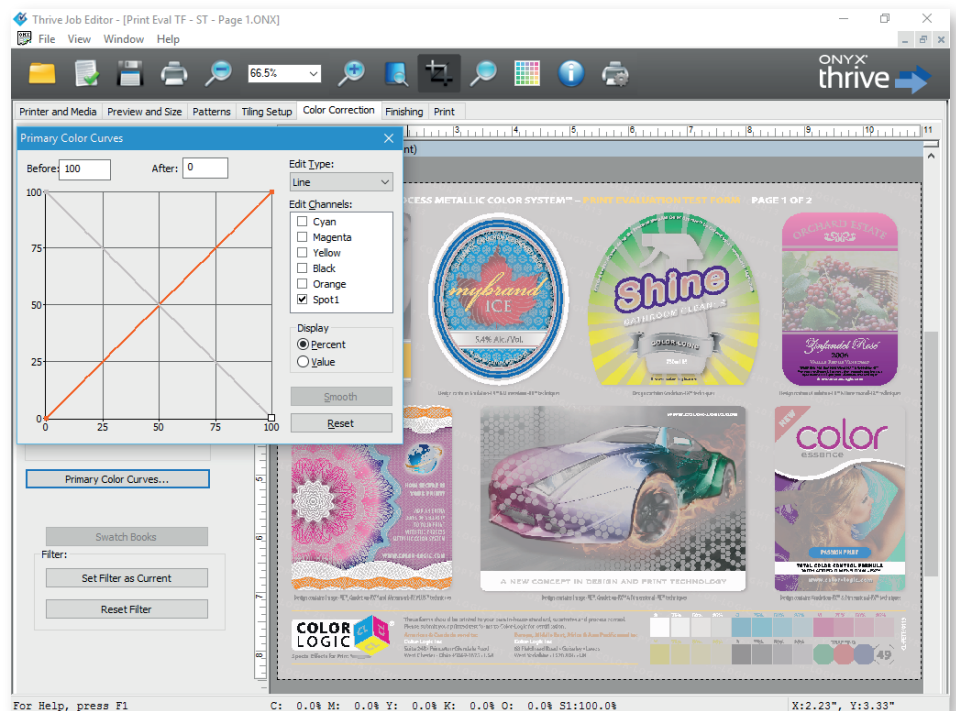


2. Change "**Edit Type:**" to "**Line**"

3. Under "**Edit Channels:**"
   select **Spot1 (CL 4713 SILVER)**,
   then grab the handles and
   reverse the slope



4. Data for just the channel
   should now be inverted.



**TIP:** This color correction setup can be exported as a color filter and added to a Quick Set for automation. (The Filter Manger can be found by selecting the Filter button on the Color Correction tab > then selecting the Manager button.)