

Fiery/Fujifilm PC11/PC21 settings for working with Color-Logic files using Silver or White toner.


Color-Logic uses a special spot color name. This color must be added to the Special color library.

In Fiery Command Workstation select the Fiery you are working with and then click on the three dots that are right of the Fiery's name, and select *Device Center*. The *Device Center* window will open.

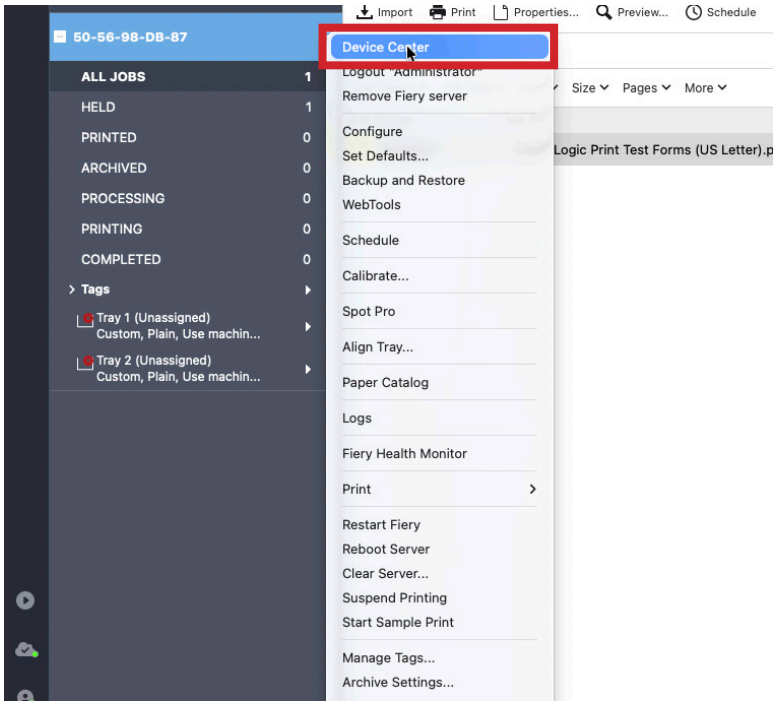


In *Device Center* select *Specialty Colors*. For the *White Toner* and *Silver Toner* group names, add the color **CL 4713 SILVER**. There must be no leading or trailing spaces and the case and spacing must be entered as shown.
Click on the *White Toner* group name, then click on the *+New* button and enter **CL 4713 SILVER** and then click on OK.
Do the same for the *Silver Toner* group.
Close *Device Center*.

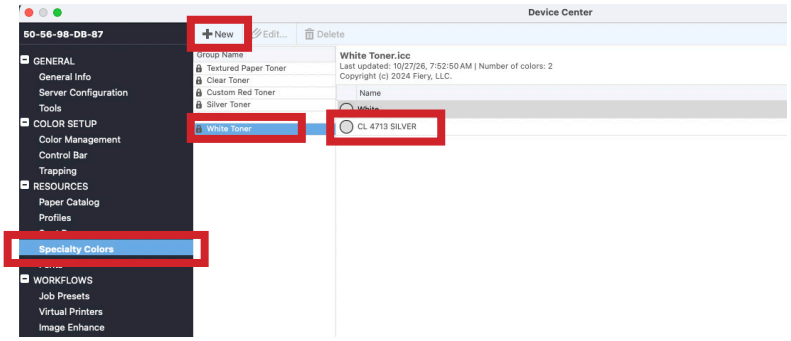


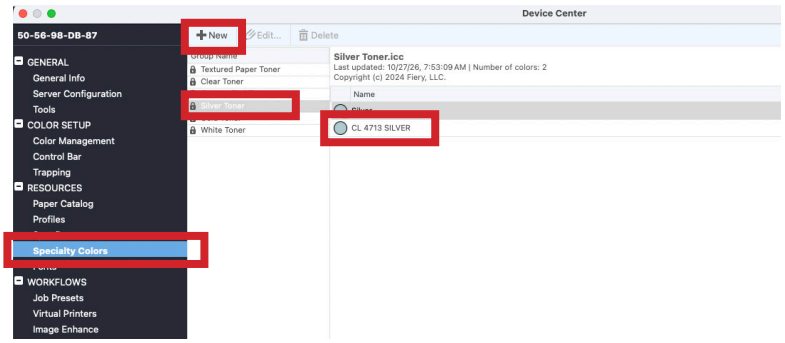

Select your Color-Logic job in Fiery Command Workstation.
Double click on the job to open up *Job Properties*.
Click on the *Specialty Colorant* tab in *Job Properties*.
For printing on metallic paper using White Toner, click on *Apply specialty color under CMYK* and select *White toner*. Make sure that only the *"White" spot colors* and *Invert specialty toner* are selected. This will print white toner where there is no or little metallic effect.

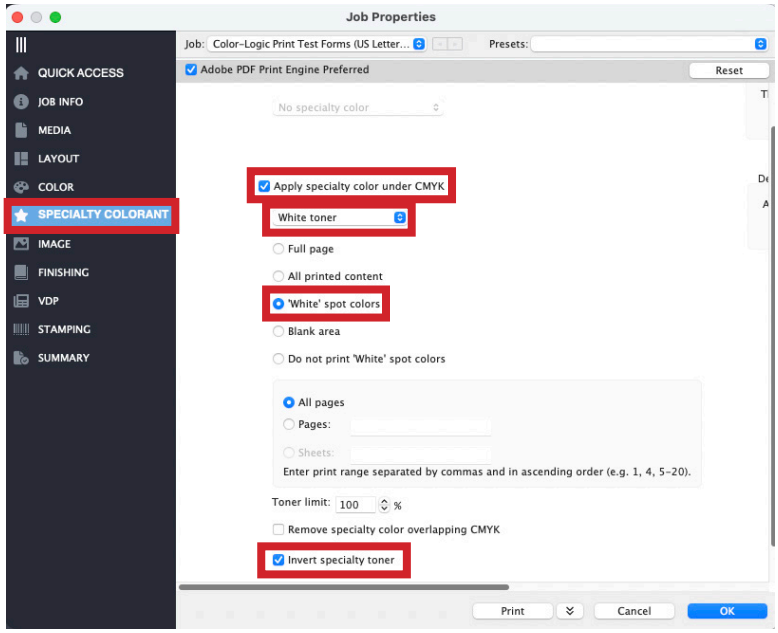

For printing on white paper using Silver Toner, click on *Apply specialty color under CMYK* and select *Silver toner*. Make sure that only the *"Silver" spot color(s) and selected object types is selected*. No additional object types should be selected. Do Not select *Invert specialty toner*.

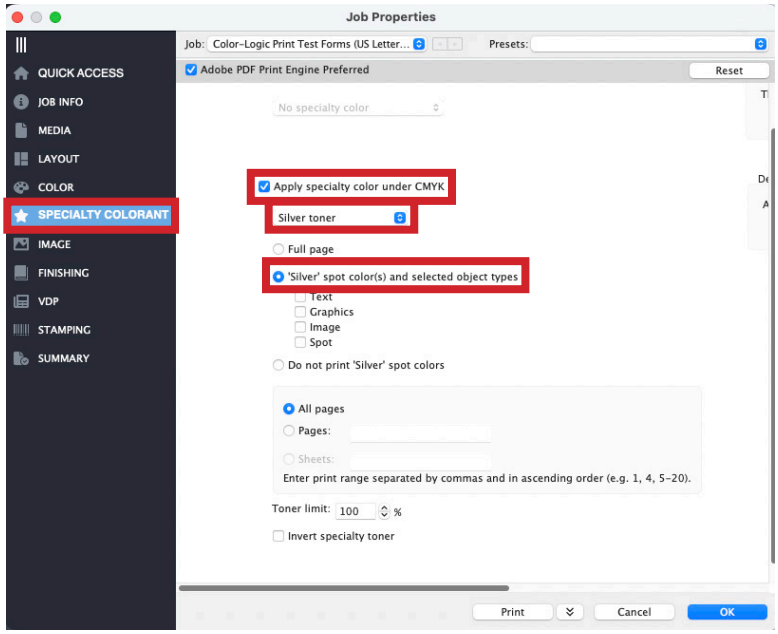

Make other Job Property settings like media and then OK or Print.
You can also do a process and hold and then view your job in ImageViewer before printing to verify that all the specialty toners are printing correctly.